



TECHNICAL QUOTE

8 × 4 m pool – Villa in Valencia

Sample client · 1 Fictitious Street, Valencia

QUOTE NO.	DATE	TOTAL AMOUNT
D-2026-014	17/09/2026	22.445,50 €
		VAT included

Valid for 30 days

CONTENTS

1	Site preparation	1650,00 €
2	Pool shell	16.900,00 €

CONTACT

TEL.
600 000 000

EMAIL
demo@example.com

WEB
presupuesta.eu

ADDRESS
10 Example Avenue, Valencia



TECHNICAL SPECIFICATIONS

Pool type	Sprayed reinforced concrete
Dimensions	8,00 × 4,00 m
Water surface	32,00 m²
Depth	from 1,20 to 1,80 m
Volume	48,00 m³
Finish	non-slip porcelain tiles

DESCRIPTION OF THE WORK

1	Site preparation	1650,00 €
---	------------------	-----------

- Setting out the pool on site with the agreed dimensions and level checks.
- Machine excavation, loading and removal of soil to an authorised tip.
- Compacted gravel base to bed the pool shell.
If rock is found, breaking it out is quoted separately.

2	Pool shell	16.900,00 €
---	------------	-------------

- Floor and walls reinforced with ribbed steel mesh, with spacers for concrete cover.
- Sprayed concrete floor and walls forming a one-piece shell with no joints.
- Interior waterproofing with two coats of flexible mortar.
- Steps: built-in corner steps.
- Lining in non-slip porcelain tiles on floor, walls and steps (approx. 68,00 m²), with pool-grade adhesive and grout.

FILTRATION AND INSTALLATION

- 600 mm sand filter with multiport valve and pressure gauge.
- 1 HP self-priming pump with pre-filter.
- 4 return inlets, main drain and vacuum point.
- Control panel with timer and protections, and 2 colour LED lights.



COST SUMMARY

1. Site preparation	1650,00 €
2. Pool shell	16.900,00 €
Taxable base	18.550,00 €
VAT (21 %)	3895,50 €
Total · VAT included	22.445,50 €

PAYMENT MILESTONES

	30 %	Quote signed	6733,65 €
	40 %	Shell finished	8978,20 €
	30 %	Pool handover	6733,65 €

OPTIONAL EXTRAS

NOT INCLUDED IN THE TOTAL OF 22.445,50 €	
Salt chlorination Salt electrolysis unit with automatic control: softer water and fewer chemicals.	+ 1750,00 € + VAT
Spa area Bench with air jets built into the pool.	+ 1200,00 € + VAT
Decorative waterfall Water curtain over the perimeter wall, installation included.	+ 950,00 € + VAT
Heat pump To extend the swimming season into spring and autumn.	+ 2900,00 € + VAT
Artificial grass around the pool Ground levelling and 35 mm artificial grass.	+ 19,00 €/m² + VAT

GENERAL TERMS

Warranty
The shell has a 10-year watertightness warranty; the filtration equipment carries the manufacturer's warranty.

Payment terms
30 % Quote signed (6733,65 €); 40 % Shell finished (8978,20 €); 30 % Pool handover (6733,65 €)

Not included
Permits and council fees, water for filling and any work not described in this quote.

Validity
30 days.




FOR THE COMPANY

ACCEPTED BY THE CLIENT · SIGNATURE AND DATE

ANNEX · PLANS

PLAN VIEW

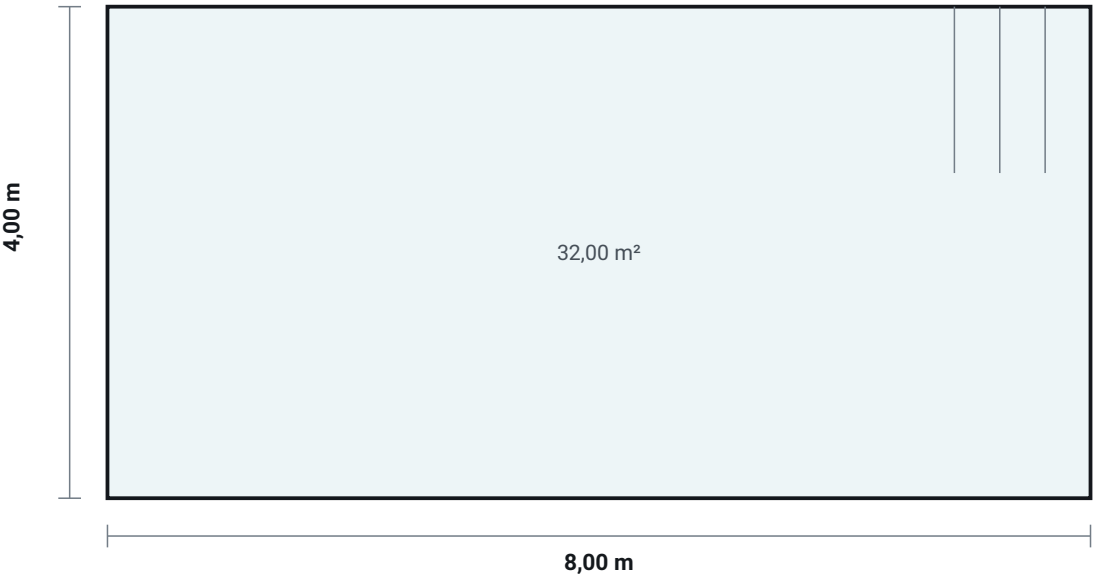

LONGITUDINAL SECTION



Plans generated from the measurements in this document. For guidance only, not to scale.